

Type D



Quick acting fuse links are used for protection against short circuits and overloads in most circuits.

Time Lag fuse links are used for the protection of input motor circuits, in combination with circuit breakers and motor protection switches.

Manufactured to IEC269, DIN 49515

Accessories

D type Fuse Sockets

The Fuse Sockets are intended to fix the complete fuse on the mounting surface. The fuse base accommodates the fuse link and the gauge piece providing connectability for the circuit wiring.

Catalogue Ref. SFD27 and SFD33 for single pole. TFD27 and TFD33 for triple pole.

Voltage: 500V ac

Carton Quantity: 10

D type Fuse Carriers (Caps)

The fuse carriers are intended to ensure quick interchangeability of the fuse links

Catalogue Ref. CD27 (caps for D11) or CD33 (caps for D111).

Voltage: 500V ac

Carton Quantity: 10

D type Gauge Pieces

The gauge pieces preclude the possibility of overfusing (i.e. prevent the fuse link, having a rated current higher than prescribed, to be placed into the fuse socket).

Catalogue Ref. GD27 or GD33


Voltage: 500V ac

Carton Quantity: 10


Gauge Piece Key: Catalogue number NZK




Cat. No.	Dia. 'D' (mm)	Colour Code
2D16	6	Pink
4D16	6	Brown
6D16	6	Green
10D16	8	Red
16D16	10	Grey
20D16	12	Blue
25D16	14	Yellow



Cat. No.	Dia. 'D' (mm)	Colour Code
2D27	6	Pink
4D27	6	Brown
6D27	6	Green
10D27	8	Red
16D27	10	Grey
20D27	12	Blue
25D27	14	Yellow



Cat. No.	Dia. 'D' (mm)	Colour Code
35D33	16	Black
50D33	18	White
63D33	20	Copper

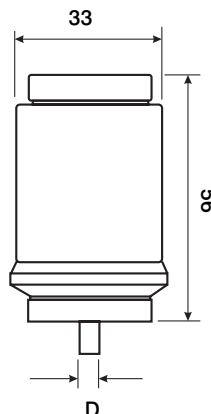

Cat. Ref.	Dia. 'D'	Colour Code
80D125	5	Silver
100D125	7	Red

Order Code: Rating + D16Q (quick)
Rating + D16 (delay)

Body Size: E16-D1

Ratings (A): 2, 4, 6, 10, 16, 20, 25

Rated Voltage (V): 500 ac

Carton Quantity: 20

Order Code: Rating + D27Q (quick)
Rating + D27 (delay)

Body Size: E27-D11

Ratings (A): 2, 4, 6, 10, 16, 20, 25

Rated Voltage (V): 500 ac

Carton Quantity: 5

Order Code: Rating + D33Q (quick)
Rating + D33 (delay)

Body Size: E33-D111

Ratings (A): 35, 50, 63

Rated Voltage (V): 500 ac

Carton Quantity: 5

Order Code: Rating + D125Q (quick)
Rating + D125 (delay)

Body Size: E125-D1V

Ratings (A): 80, 100

Rated Voltage (V): 500 ac

Carton Quantity: 10

Notes:

When ordering Fuse Sockets, please specify DIN rail or Panel Mounted.


All accessories are non stock items and are supplied to special order only.

Type DO

The design feature of a cooler running fuse link with compact dimensions, giving the advantage in space saving over the D' type.

Manufactured to IEC269 and VDE 0636 Standards

Type	Cat. No.	A	B	Colour Code
DO1	2NZ01	36.0	11.0	Pink
	4NZ01			Brown
	6NZ01			Green
	10NZ01			Red
	16NZ01			Grey
DO2	20NZ02	36.0	15.0	Blue
	25NZ02			Yellow
	35NZ02			Black
	50NZ02			White
	63NZ02			Copper

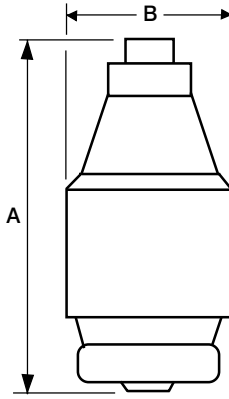

Order Code:	Rating + NZ01
Body Size:	E14
Ratings (A):	2, 4, 6, 10, 16
Rated Voltage (V):	400 ac, 250 dc
Carton Quantity:	10

Order Code:	Rating + NZ02
Body Size:	E18
Ratings (A):	20, 25, 35, 50, 63
Rated Voltage (V):	400 ac, 250 dc
Carton Quantity:	10

Accessories

DO type Fuse Sockets

Catalogue Ref. FN01C (DO1 size) and FN02C (DO2 size) for single pole.
TFN02C (DO2 size) for triple pole.

Voltage: 400V ac

Carton Quantity: 10

DO type Fuse Carriers (Caps)

Catalogue Ref.. CN01 (Caps for DO1); CN02 (Caps for DO2).

Voltage: 400V ac

Carton Quantity: 10

DO type Gauge Pieces

Catalogue Ref. GN01 or GN02

Voltage: 400V ac

Carton Quantity: 10

All accessories are non stock items and are supplied to special order only.

Type D' Ultra Quick

Primarily for the protection of Semiconductor devices, with gR characteristics. Manufactured to IEC269 and VDE 0636 Standards.

Colour Coding

Order Code:	Rating + D16R
Ratings (A):	2, 4, 6, 10, 16, 20, 25
Rated Voltage (V):	500 ac, 315 dc
Carton Quantity:	20
Order Code:	Rating + D27R
Ratings (A):	2, 4, 6, 10, 16, 20, 25, 30
Rated Voltage (V):	500 ac, 315 dc
Carton Quantity:	5
Order Code:	Rating + D33R
Ratings (A):	35, 50, 63
Rated Voltage (V):	500 ac, 315 dc
Carton Quantity:	5
Order Code:	Rating + D125R
Ratings (A):	80, 100
Rated Voltage (V):	500 ac, 315 dc
Carton Quantity:	10

For size specification please refer to page 30.


Catalogue Suffix	Rating	Colour Code
D16R	2	Pink
	4	Brown
	6	Green
	10	Red
	16	Grey
	20	Blue
D27R	25	Yellow
	2	Pink
	4	Brown
	6	Green
	10	Red
	16	Grey
	20	Blue
D33R	25	Yellow
	30	Black
	35	Black
D125R	50	White
	63	Copper
D125R	80	Silver
	100	Red

Type DO' Ultra Quick.


All dimensions in mm

For use in the protection of Semiconductor Devices with gR characteristics. Manufactured to IEC269 and VDE0636 Standards.

Order Code:	Rating + NZ01R
Ratings (A):	2, 4, 6, 10, 16
Rated Voltage (V):	400 ac, 250 dc
Carton Quantity:	10
Order Code:	Rating + NZ02R
Ratings (A):	20, 25, 35, 50, 63
Rated Voltage (V):	400 ac, 250 dc
Carton Quantity:	10



Type NZ01R

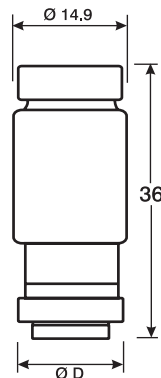

Type NZ02R

Catalogue Number	Diameter (mm)	Colour Code
2NZ01R	7.3	Pink
4NZ01R	7.3	Brown
6NZ01R	7.3	Green
10NZ01R	8.5	Red
16NZ01R	9.7	Grey

Catalogue Number	Diameter (mm)	Colour Code
25NZ02R	12.1	Brown
35NZ02R	13.3	Black
50NZ02R	14.5	White
63NZ02R	15.9	Copper